**RM10C****HYBRID RECORDER****OUTLINE**

RM10C is 100mm calibrated hybrid recorder in a 144x144 DIN front panel and short depth of 150mm case housing.

The recorder has versatility of universal input and scale in wide ranges and flexibility of user-reconfigurable unique functions. RM10C offers 1, 2 continuous pen and 6 dot point models.

**FEATURES**

- Short case depth size of 150mm
- IP65: Dust-proof, Water-proof
- Wide LED with 18mm heights display
- Allows user-selected consumables
- RS-232C communication interface in standard specifications
- CE approved
- Weight only 1.5kg (Multipoint type)
- Optional portable housing case available

**SPECIFICATIONS**● **Input signal****DC voltage:**

$\pm 10$ , 0 ~ 20, 0 ~ 50,  $\pm 200$  mV DC,  $\pm 1$ , 0 ~ 5,  $\pm 10$  V DC

**Thermocouple:**

B, R, S, K, E, J, T, C, Au-Fe, N, PR40-20, PL II, U, L

**Resistance temperature detector:** Pt100, JPt100**DC current:** 4 ~ 20mA DC

(with external shunt resistor: 250 $\Omega$   
<Charged:HMSU3081A11>)

● **Performance**

**Accuracy:** See RANGE TABLE

**Dead band:** Within 0.2%

**Input impedance:**

10M $\Omega$  min. in mV, TC input;  
200k $\Omega$  min. in mV, TC input (with burnout protection);  
1M $\Omega$  min. in Voltage input;  
250 $\Omega$  (External shunt resistor) in mA input

**Allowable signal source resistance:**

10k $\Omega$  max. in mV, TC input;  
100 $\Omega$  max. in mV, TC input (with burnout protection);  
1k $\Omega$  max. in Voltage input;  
10 $\Omega$  max. per line in RTD input

**Normal mode rejection ratio:** 60dB min. (50/60 $\pm$ 0.1Hz)

**Common mode rejection ratio:** 140dB min. (50/60 $\pm$ 0.1Hz)

**Isolation resistance:** 0.5kV DC 20M $\Omega$  min. between the each terminal and grounding terminal

**Withstand voltage:**

1.5kV AC for 1 minute between power terminal and grounding terminal;  
0.5kV AC for 1 minute between input terminal and grounding terminal;  
0.2kV AC for 1 minute between the input terminals

**Inter channel maximum noise voltage:**

200 V AC at 50/60 Hz

**Vibration resistance:** 10 to 60Hz 1m/s<sup>2</sup> max.**Shock resistance:** 2m/s<sup>2</sup> max.**Clock precision:**  $\pm 50$ ppm max.**Chart feed accuracy:**  $\pm 0.1\%$  max.● **Structure****Mounting:** Panel mount

Allowable backward inclination: Within 30°

**Material (Color):**

Case, Polycarbonate (Black), Glass 10% UL94-V0;  
Door, Polycarbonate, UL94-V2 (Clear)  
Dust-proof, Water-proof  
(Complies with the IEC60529-IP65)

● **Power Supply Voltage**

**Power voltage (rated):** 100 ~ 240V AC

**Power voltage:** 85 ~ 264V AC

**Frequency (rated):** 50/60Hz

**Frequency:** 45 ~ 65Hz

## ● Normal Operating Conditions

**Ambient temperature:** 0 ~ 50°C

**Ambient humidity:** 20 ~ 80%RH

**Supply voltage:** 85 ~ 264V AC

## ● Alarm (Relay output is optional)

**Alarm types:** 2 types(H, L), 4 levels/channel

**Alarm output:** 250V AC, 3A max. loaded;  
30V DC, 3A max. loaded;

**Hysteresis width:** 0.5%

**Setting accuracy:** Digital indication accuracy

### Outputs:

Pen Model, 3 point (Built-in option, normally open);

Multipoint Model, 6 point (Built-in option, normally open)

## ● CE Marking

**Low Voltage Directive:** EN61010-1

**EMC Directive:** EN61326-1 Class A

**RoHS Directive:** EN50581

## ● Communication Interface

**RS-232C (Standard):**

1200, 2400, 4800, 9600, 19200, 38400

**RS-485 (Option):**

1200, 2400, 4800, 9600, 19200, 38400

## ● DI function

Function	Description
Chart Feed Start/Stop	Close: Starts Open: Stops
Change Chart Speed	Close: Chart speed 1 Open: Chart speed 2
Comment Print	Prints programmed characters (Multipoint model is up to 16 characters per line. Pen model is up to 12 characters per line.)
Manual Print	Close: Start to print
Date and Time Print	Close: Start to print

Up to 3 functions among above can be selected in one recorder.

## ● Option

**Chart sensor:** Detects paper-out to output an alarm.

## INDIVIDUAL SPECIFICATION

Block	Item	Pen Model	Multi point Model
Input Unit	Measuring Point	1, 2	6
	Input Sampling	125ms	10s/6ch
	Display Interval	2.5s	2.5s
Record & Printer	Recording Form	Disposable felt pen	Wire dot with 6-color ink ribbon
	Printing Form	Wire dot (one color ink ribbon)	
	Recording Width	100mm	
	Step Response	1.0s max. to 95% of step-wise input	-
	Dot Print Interval	-	10s/ch (Note 2)
	Chart Paper	Length : 16m, Width : 114mm, Folding width : 40mm (Note3)	
	Chart Speed	5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 90, 100,120, 150, 160, 180, 200, 240, 300, 360, 375, 450, 600, 720, 750, 900, 1200, 1500, 1800, 2400, 3000, 3600, 4500, 4800, 5400, 6000, 7200, 9000, 10800, 12000mm/h	0, 1, 2, 3, 4, 5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 80, 90, 100,120, 150, 160, 180, 200, 240, 300, 360, 375, 450, 600, 720, 750, 900, 1200, 1500mm/h (Analog recording is not done during the chart speed setting 0mm/h.)
	Recording Color (Note1)	1 pen (Red), 2 pen (Green)	No.1 (Purple), No.2 (Red), No.3 (Green), No.4 (Blue), No.5 (Brown), No.6 (Black)
	Printing Color	Purple	Purple, Red, Green, Blue, Brown, Black
Weight		2.5kg max,	1.5kg max.
Power Consumption		30VA max. (at 100VAC)	25VA max. (at 100VAC)

(Note 1) User-changeable arbitrary colors with set-up configuration.

(Note 2) User-selective interval from 10, 20, 30 and 60 seconds.

(Note 3) Clean Chart Paper: Length 12m.

## MEASUREMENT RANGE

The junction compensation accuracy is not calculated into digital readout accuracy and recording accuracy.  
The junction compensation accuracy is based on operating conditions: Temperature, 23±2°C; Humidity, 55 ±10%RH; Power source 85 ~ 264V AC; Frequency, 50/60Hz ±1%;

Warm-up time 30 minutes min.; No effect of vibration and shock of over recorder's resistibility.

Junction compensation accuracy  
B, R, S, Au-Fe, PR40-20 : ±1°C  
K, E, J, T, C, N, PL II, U, L: ±0.5°C

Type	Range	Measurement range	Measurement		
			Digital		Analog
			Accuracy	Max. Resolution	Accuracy
DC Voltage/ Current Input		-10.00 ~ 10.00 mV	±(0.2% of rdg + 3digits)	10 μV	Digital accuracy ±(0.3% of span)
		0.00 ~ 20.00 mV	±(0.2% of rdg + 3digits)	10 μV	
		0.00 ~ 50.00 mV	±(0.2% of rdg + 2digits)	10 μV	
		-200.0 ~ 200.0 mV	±(0.2% of rdg + 3digits)	100 μV	
		-1.000 ~ 1.000 V	±(0.1% of rdg + 3digits)	1mV	
		0.000 ~ 5.000 V	±(0.2% of rdg + 2digits)	1mV	
		-10.00 ~ 10.00 V	±(0.3% of rdg + 3digits)	10mV	
		4.00 ~ 20.00 mA	±(0.2% of rdg + 2digits)	0.01mA	
Thermo- couple	R1	0.0 ~ 1760.0°C	±(0.15% of rdg + 1°C) (Note 2)	0.1°C	Digital accuracy ±(0.3% of span)
	R2	0.0 ~ 1200.0°C	±(0.15% of rdg + 0.8°C) (Note 2)		
	S	0.0 ~ 1760.0°C	±(0.15% of rdg + 1°C) (Note 2)		
	B	0.0 ~ 1820.0°C	±(0.15% of rdg + 1°C) (Note 1)		
	K1	-200.0 ~ 1370.0°C	±(0.15% of rdg + 0.7°C) (Note 3)		
	K2	-200.0 ~ 600.0°C	±(0.15% of rdg + 0.4°C) (Note 3)		
	K3	-200.0 ~ 300.0°C	±(0.15% of rdg + 0.3°C) (Note)		
	E1	-200.0 ~ 800.0°C	±(0.15% of rdg + 0.5°C)		
	E2	-200.0 ~ 300.0°C	±(0.15% of rdg + 0.4°C)		
	E3	-200.0 ~ 150.0°C	±(0.15% of rdg + 0.3°C)		
	J1	-200.0 ~ 1100.0°C	±(0.15% of rdg + 0.5°C) (Note 4)		
	J2	-200.0 ~ 400.0°C	±(0.15% of rdg + 0.4°C) (Note 4)		
	J3	-200.0 ~ 200.0°C	±(0.15% of rdg + 0.3°C) (Note 4)		
	T1	-200.0 ~ 400.0°C	±(0.15% of rdg + 0.5°C) (Note 4)		
	T2	-200.0 ~ 200.0°C	±(0.15% of rdg + 0.4°C) (Note 4)		
	N	0.0 ~ 1300.0°C	±(0.15% of rdg + 0.7°C)		
	C	0.0 ~ 2320.0°C	±(0.15% of rdg + 1°C)		
	Au-Fe	1.0 ~ 300.0K	±(0.15% of rdg + 1K) (Note 5)	0.1K	
	PR40-20	0.0 ~ 1880.0°C	±(0.15% of rdg + 1°C) (Note 6)	0.1°C	
	PL II	0.0 ~ 1390.0°C	±(0.15% of rdg + 0.7°C)		
L	-200.0 ~ 900.0°C	±(0.15% of rdg + 0.5°C) (Note 7)			
U	-200.0 ~ 400.0°C	±(0.15% of rdg + 0.5°C) (Note 7)			
Resistance Temperature Detector	Pt100-1	-200.0 ~ 650.0°C	±(0.15% of rdg + 0.3°C)	0.1°C	Digital accuracy ±(0.3% of span)
	Pt100-2	-200.0 ~ 200.0°C	±(0.15% of rdg + 0.2°C)		
	JPt100-1	-200.0 ~ 630.0°C	±(0.15% of rdg + 0.3°C)		
	JPt100-2	-200.0 ~ 200.0°C	±(0.15% of rdg + 0.2°C)		

NOTE:

Note1: 400 ~ 600°C: ±2°C

A range under a span of 400°C: Accuracy is out of guarantee

Note2: 0 ~ 100°C: ±3.7°C 100 ~ 300°C, ±1.5°C

Note3: -200 ~ -100°C: ±(0.15% of rdg + 1°C)

Note4: -200 ~ -100°C: ±(0.15% of rdg + 0.7°C)

Note5: -1 ~ 20K: ±2.4K

Note6: 0 ~ 300°C: ±37.6°C 300 ~ 800°C, ±18.8°C

Note7: -200 ~ -100°C: ±(0.15% of rdg + 0.7°C)

## STANDARD FUNCTIONS


Item	Description
Analog recording	Pen Models: Continuous pen tracing Multi point Model: Dot printing with 6-color ribbon cartridge
Digital display	Indicates channel no., process variable, date, chart speed, alarm set point in front display.
Logging print	Prints date, time, scale, chart speed, each channel's process variable and engineering unit at a programmed interval.
List print	Prints chart speed, type of input, range, engineering unit, alarm set point, comment print status, Printing description, logging print ON/OFF configuration, ZONE recording configuration, point focus configuration
Engineering list print	Prints configuration of channel/tag print switch, alarm print, logging print ON/OFF, reference time, interval, alarm hysteresis, burnout protection, scaling print ON/OFF, DI function (option)
Affix print (Multipoint Model)	Prints Channel number besides analog recording line.
Manual print	Prints measured data by the front key operation. Analog recording stops during manual printing.
Skip (Multipoint model)	Abandon dot print of inputs as required.
Programming	Programs chart speed, alarm set point, logging print interval, skip, date and time.
Memory Backup	Back-up for clock by built-in lithium battery for 10 years, 5 years in unpowered state. A non-volatile memory stores configuration and calibration data.
Alarm	4 alarm set point per channel.
Chart Speed	Selects chart speed from 41type.
Clock indicator	Indicates year, month, day, hour and minute. Sets the year adjusts leap year automatically.
Self Diagnostics	Occurring some type of the defect to indicates "ERROR".
Scaling	Indicates and record the input of a unification signal etc. is changed into the engineering scales.

## CONFIGURABLE FUNCTIONS



Function	Description
Burnout protection	Sets pointer at over 100% per inputs when input becomes open for T/C or $\pm 50\text{mV}$ max. input.
Tag Number	Tag number up to 5 characters for pen models/7 characters for multipoint model per channel can be programmed, and prints at logging print.
Temperature Compensation	Inside/outside of reference junction compensation (DE/DH connection) can be specified.
Copy Function	Channel configuration data can be copied to another channel.
Input offset	Input offset per channel can be programmed.
ZONE Recording	Recording on the chart track in specified range per channel.
Point focus recording	Recording by point focus to 1-crease line per channel.
Decade Recording Indicating	Records and indicates up to 5 decades. 2 figures of effective number to indicate and print.
Alarm print	Prints time, channel number, setting number and type of alarm in alarming.
Alarm recovery print	Prints recovery time, recovery channel number, setting number and type of alarm at recovery.
Square root	Square root available.
Integration	Sum, balance, average among channels can be integrated.
Digital filter (Pen Model)	Digital filtering for measured data (PV) in unsteady process. Filter constant rangeability: 1.0000 to 0.0001 Formula is: $k = 0.64/T_i$ $k$ = Filter constant $T_i$ = 99.5% damping
Alarm Hysteresis Width	Alarm hysteresis width can be programmed at 0% FS or 0.5% FS.

## DIMENSION

(Unit = mm)


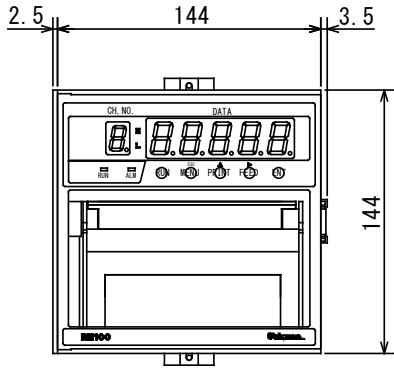


Panel Cutout (mm)

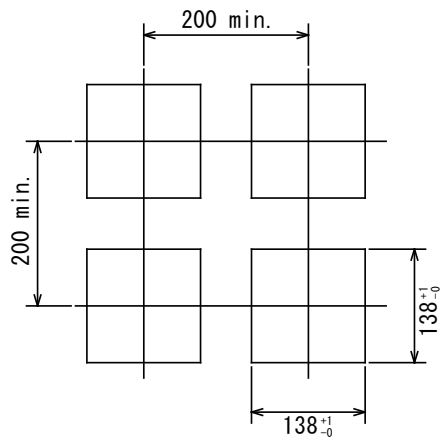
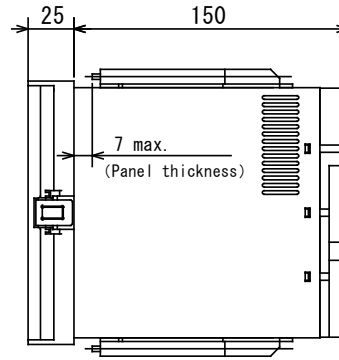


## TERMINAL ARRANGEMENT


Multipoint Model

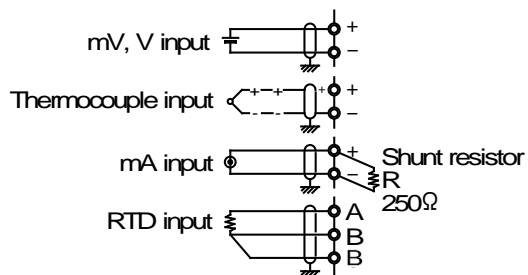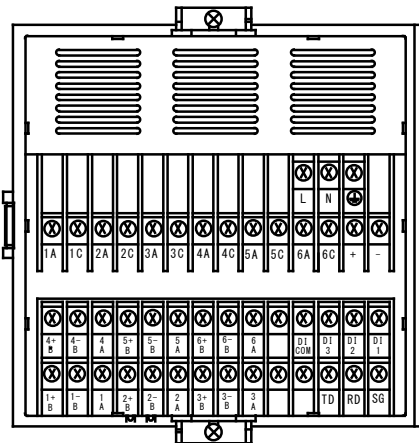

Pen Model

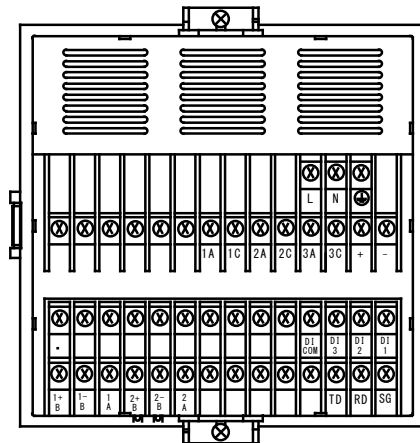

## MODEL CODE NUMBER

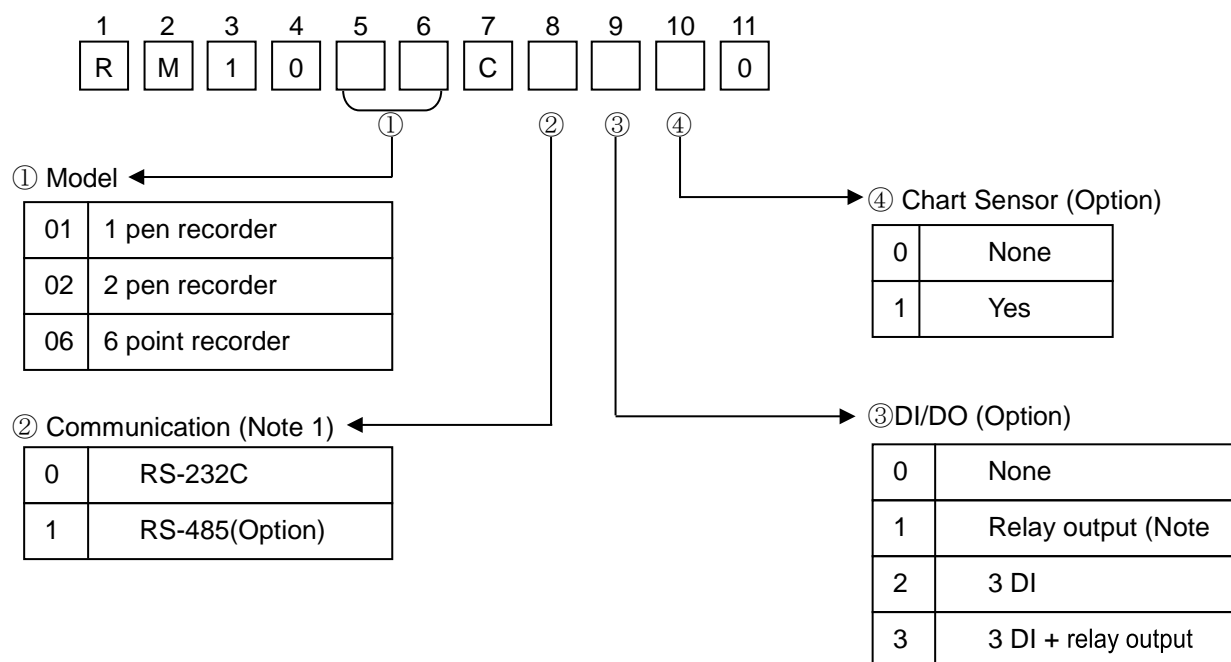

(Note 1) Combination of RS-232C and RS-485 unavailable.

(Note 2) Nos. of relay outputs:

6 point recorder 6 relays; Pen recorder 3 relays



## CAUTION

Do not install this device before consulting instruction manual



**OHKURA ELECTRIC CO., LTD.**

Head Office / Factory

Sales Offices

URL

e-mail (in English)

Saitama, JAPAN

Tokyo, Osaka, Nagoya, Kyushu, Tohoku

<https://www.ohkura.co.jp/>

[intsales@ohkura.co.jp](mailto:intsales@ohkura.co.jp)

Specifications are subject to change without notice.

For further information, a quotation or a demonstration please contact to:

Printed in Japan: Jan. 2024